
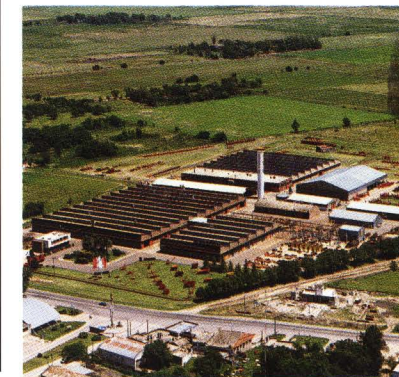


Technical Specifications - Grain Bagger Mainero 2230

		2230
Filling Tunnel:	Type:	Oblong or flattened.
	Size of the bags:	9 feet (2,74 m) - 60 and 75 meters.
	Bags Mounting:	By retractile support with hanger and winch.
Materials to bag:	All kind of dry grain.	
Transport Position:	Same as work: Doesn't require additional elements. Optional: Set of wheel hubs and tip transport draw bar.	
Work Tongue:	Foldable for tip or on truck transport.	
Tractor:	Minimun Power:	33 Kw (45 CV)
	PTO Shaft Speed:	540 r.p.m.
	Hydraulic Group:	One double acting cylinder output.
Drive System:		Protected PTO shaft.
	Safety System:	Overload clutch with shear pin.
Brake System:		Disk brake on both wheels.
		Braking power adjustable by hand pump. Pressure Gauge.
Axle:	Adjustable through hydraulic cylinder (3" or 3 1/2" x 8)	
Feeding:	High capacity auger (more than 250 tons/ hour)	
Bag Retention:	Encircling elastic harness.	
Tires:	7.50 - 15 - 8 ply. "High Grip" Qty. 2	
Total Weight:	1.250 Kg.	

Auger device for side panel discharge	
Auger Diameter	260 mm
Drive System	Hydraulic motor driven from the tractor. Spherical valve to stop the loader without necessity to get into the tractor.
Hydraulic Requirement	Flow: 40 l/min. - Pressure: 120 kg/cm ³ . Two auxiliary remote valves double acting.
Transport capacity	80 to 100 ton/hour*
Tray	Mobile to facilitate the truck approach and the transport of the device.
Wheel axle	Adjustable height by means of manual registration.
Tires	6.40 x 13 - 4 ply - Qty. 2
Total weight	380 Kg
Auger device for dumper trucks	
Auger Diameter	260 mm
Drive System	By means of hydraulic motors serial connected driven from the tractor. Spherical valve to stop the loader without necessity to get into the tractor
Hydraulic Requirement	Flow: 40 l/min. - Pressure: 120 kg/cm ³ . Two auxiliary remote valves double acting.
Transport Capacity	80 to 100 ton/ hour*
Reception gondola	2,6 m width. Support feet with revolable wheel that facilitates its hitch for transport.
Wheel axle	Adjustable height by means of manual registration.
Tyres	6.40 x 13 - 4 ply - Qty. 2
Total Weight	530 Kg

*Variable according to grain type and condition; characteristic and specification of the tractor hydraulic system. Specifications and design subject to change without notice.

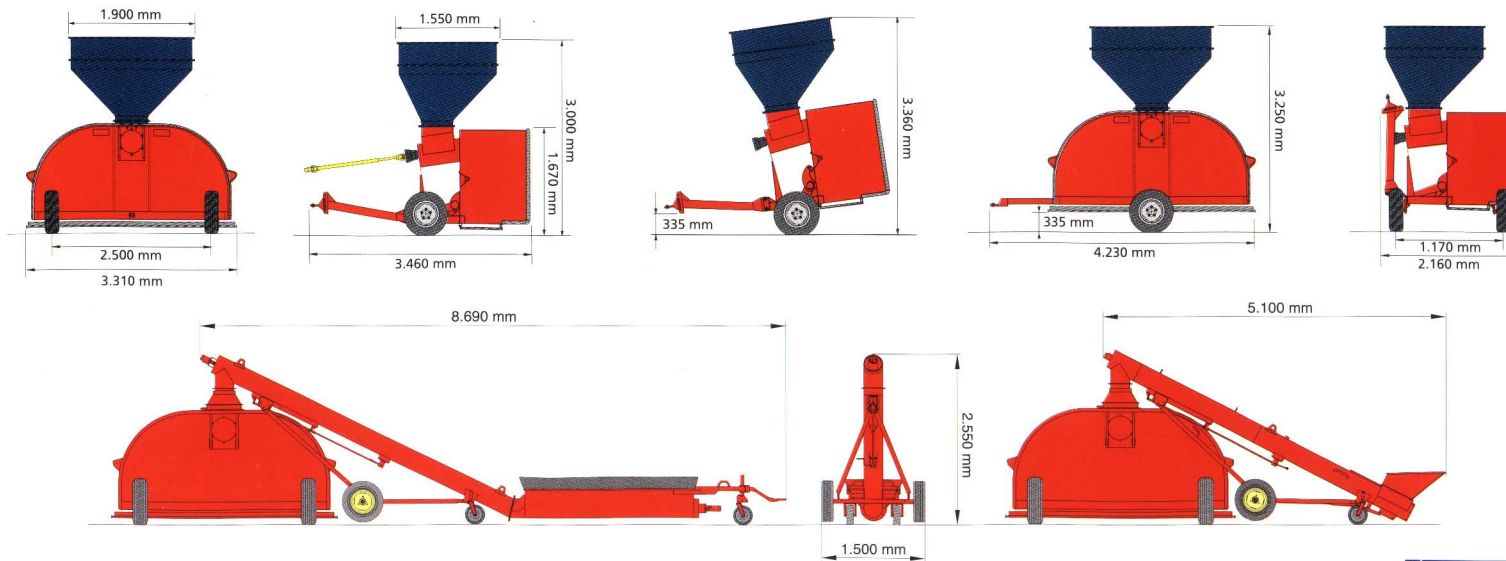

MAINERO

Carlos Mainero y Cia. S.A.I.C.F.I.
Main Office
 Add: Rivadavia N° 259 X2550DZE Bell Ville - Republic of Argentina
 Tel/Fax: +54 3534 426431 to 34
Foreign Trade
 Tel/Fax: +54 3534 426430 / 426924
 E-mail: info.comext@mainero.com.ar

www.mainero.com.ar



Norma / Standard
 IRAM 8076-0:2001